


Venus-223 / Venus-222

22" 24/7 Self-Power Medical Cart Computer




Battery x 1 Battery x 1
 USB 3.0 x 2 Smart Card Reader x 1

Venus-223

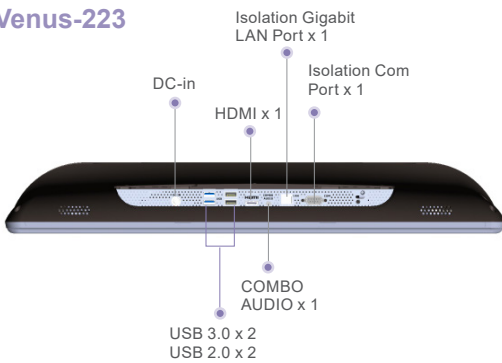

Venus-222

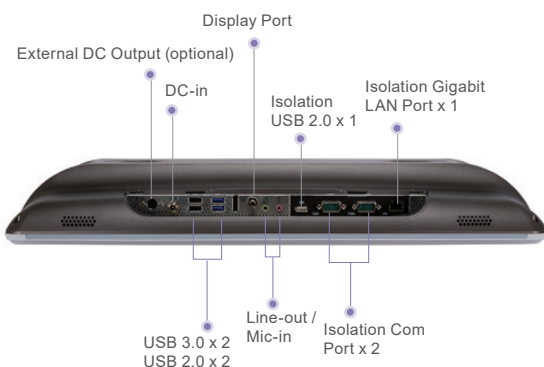

Features

- Medical grade certified (EN60601-1/UL60601-1)
- Cleanability with hospital solvents (front IP65)
- Hot swappable design, support 24/7 run time
- Intel® Skylake Dual-Core i5 / Quad-Core J1900
- Support remote monitor/control/update (ORION compatible)
- Lightweight design
- Front reading light bar
- Optional battery charger (UPower)

Specifications

Main Specifications

	Venus-223	Venus-222
Processor	Intel® Skylake Dual-Core i5	Intel® Quad-Core J1900
System Memory	DDR4 up to 32GB	DDR3 up to 8G
OS Support	Microsoft® Windows 8.1 (32bit/64bit) Microsoft® Windows 10 (32bit/64bit) Ubuntu 14.04 LTS IGEL (thin client solution)	Microsoft® Windows 7 (32bit/64bit) Microsoft® Windows 8.1 (32bit/64bit) Microsoft® Windows 10 (32bit / 64 bit) IGEL (thin client solution)
Graphics	Intel® HD Graphics 520	Intel® HD Graphics
Storage	SSD: 128G / 256G SATA2 (optional)	
Wireless Communication	802.11 ac/a/b/g/n + BT 4.0 (optional)	
Camera	2MP/5MP camera (optional)	
Touch	PCT (optional), R-TS	
Speaker	2W x2	
Security	TPM 1.2 (Trusted Platform Module), Smart Card Reader, RFID ISO 15693/14443A (optional)	
Auto Brightness	Light sensor	

Display

Display Size	21.5" VA panel
Resolution	FHD 1920 x 1080
Max. Colors	16.7M
Contrast Ratio	3000:1
Luminance (cd/m2)	250

I/O


USB	Rear I/O : USB 3.0 x2, USB 2.0 x2 Side I/O : USB 3.0 x2	Rear I/O : USB 3.0 x2, USB 2.0 x2, Isolated USB x1 Side I/O : USB 3.0 x2
Video Out	HDMI 1.4 x1	DP x1
COM	COM port x1	Isolated COM port x2
Audio	Combo audio port x1	Mic-in x1, Audio-out x1
Security	Kensington slot	N/A
Ethernet	Gigabit LAN x1	
DC-in	24V DC-in x1	

Mechanical and Environmental

VESA	75/100 mm VESA mount
Operating Temperature	0°C ~ 40°C (32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C (-4°F ~ 140°F)
Storage Humidity	10%~95%@35°C, non-condensing
Dimension	542(L) x 77(W) x 362(H) mm
Net Weight	7kg (15.4 lbs)
Packing Size	680(L) x 270(W) x 530(H) mm
Cross Weight	10.5kg (23.15 lbs)
Certification	CE/FCC Class B, UL60601-1, EN60601-1

22" 24/7 Self-Power Cart Computer

Dimension / Unit: mm

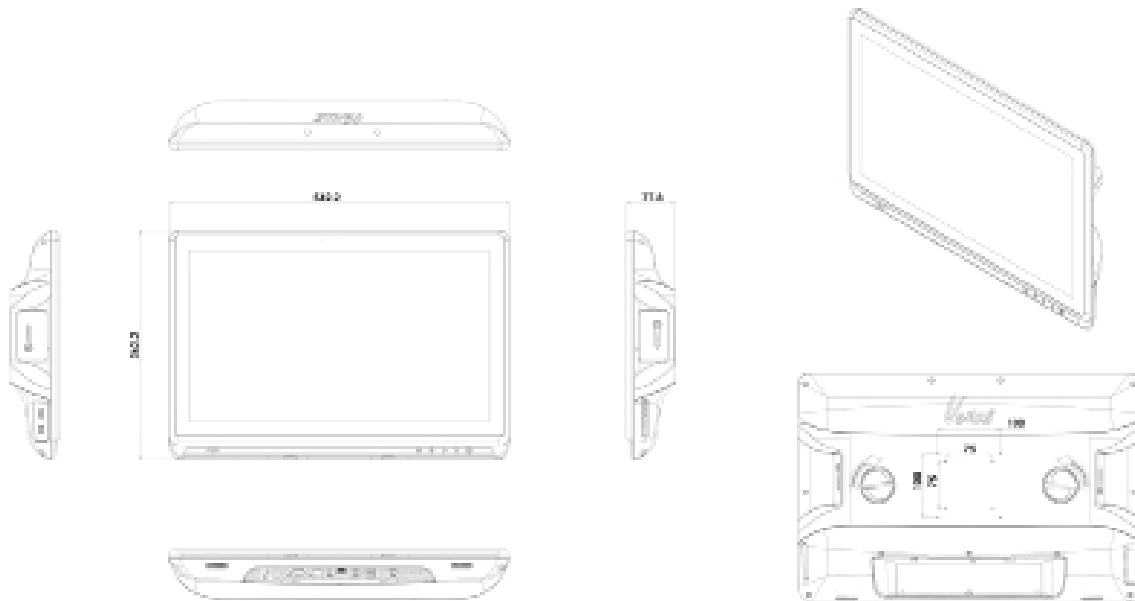

Ordering Information

- » VENUS-223ST-A1-1010
Cart Computer.i5 6300U.22".Fanless.PCT.4G RAM.SCR.TPM.Battery x2
- » VENUS-223ET-A1-1010
Cart Computer.i5 6300U.22".Fanless.RTS.4G RAM.SCR.TPM.Battery x2
- » VENUS-222ET-A1-1010
Cart Computer. J1900. 22". Fanless. R-TS. 4GB RAM. SCR. TPM. Battery x2

Optional Information

- | | |
|--|--|
| <ul style="list-style-type: none"> » OPM-P02T-01
2 Battery kit. Li-ion 3S3P. 10.8V/8550mAh » OPM-P01T-02
2 Battery Kit. Li-ion 3S2P. 10.8V/5800mAh » 1255301501
Medical Adaptor. 100-240V/1.0-2.5A 24V/6.25A 150W » OPM-S02R-A0
RFID Reader Kit » OPM-C09W-A0
WLAN dual band module kits. INTEL 802.11ac/a/b/g/n dual antenna » OPM-C07W-A2
WLAN dual band module kits. AzureWave 802.11a/b/g/n + BT 4.0 | <ul style="list-style-type: none"> » OPM-P01C-03
6-Slot Power bank + Medical adaptor 24V/250W » OPM-P02C-02
2-Slot Power bank + Medical adaptor 24V/150W » OPM-H10A-00
VESA 75/100 Clamp type spring arm (Sliver) » OPM-V01C-01
2MP Camera Kit » OPM-V02C-01
5MP Camera Kit |
|--|--|